

# LENS

# CATALOGUE



# Freeform progressive

### Standard

- Back side progressive design
- Budget solution for general daily use

Far	
Near	
Comfort	
Corridor length [mm]	12/14/16
Minimum fitting height [mm]	16/18/20



### **EasyFit**

- Easy adaption
- Specifically designed for modern working places

Far	
Near	
Comfort	
Personalization	✓
Corridor length [mm]	12 – 16
Minimum fitting height [mm]	16 – 20



### **Dynamic**

- Wide and clear distance vision
- Compatible with sports frames
- Designed for active wearer

Far	
Near	
Comfort	
Personalization	✓
Corridor length [mm]	12 – 16
Minimum fitting height [mm]	16 – 20

### **MiniFit**

Short corridor progressive lens engineered for extremely small frame

Far	
Near	
Comfort	
Corridor length [mm]	10
Minimum fitting height [mm]	14



# FREEFORM PROGRESSIVE

### Compo

- Superior balance between the reading utility of the near zone and the dynamic vision utility of the distance and intermediate zones
- Allowing the wearer to perform different types of task with equal comfort

Far	
Near	
Comfort	
Personalization	$\checkmark$
Corridor length [mm]	12 – 16
Minimum fitting height [mm]	16 – 20



### Nature

- Custom-made for today's lifestyle
- Offers a really natural vision for all areas and a comfortable change between near and far vision
- ⇒ Variable inset (0-5mm) improves the near visual field



#### Far Near Comfort Personalization Frame shape Optimized 10 – 16 Corridor length [mm] Minimum fitting height [mm] 14 - 20

### Reader

- For all presbyopes who work more than 2-3 hours per day in front of computer.
- For people who perform visually intensive indoor activities such as reading, doing handicrafts.

Far	
Near	
Comfort	
Corridor length [mm]	12
Minimum fitting height [mm]	16

### **EzDrive**

- Wide fields of vision in the far and intermediate zones.
- Easy focus switching between street, dashboard, navigation system and side mirrors.

Far	
Near	
Comfort	
Personalization	✓
Corridor length [mm]	12 – 16
Minimum fitting height [mm]	16 – 20






### Dual-side lens technology delivers a customized natural-viewing experience

The OptiMaxer DS dual surface progressive lens design features a unique variable front surface base curve - a surface innovation that provides the optically ideal base curve across all viewing zones.

The front surface, unlike most other free-form designs, is not spherical but has a unique variable front surface base curve that continually increases in vertical direction.

This front surface innovation provides benefits to wearers in both the distance and near zones. Wearers enjoy noticeably increased acuity in the periphery of the distance zone, as well as a reading area that is wider and more comfortable.

The HD inner compensation calculation creates a customized lens optimized for the wearer's prescription and frame selection.

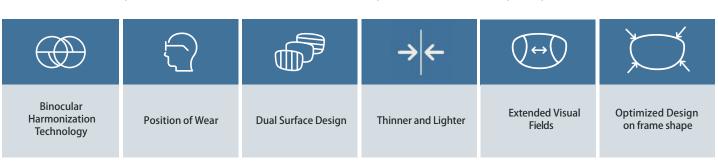



**OptiMaxerDS** 



**Traditional Progressive** 


#### **Design Benefits:**

- Increases clarity in the peripheral area of the lens and reduces distortion to the lens edge
- Noticeably more relaxed vision thanks to precise and effortless focusing
- Lens thickness reduced for a thinner, lighter and more cosmetically- appealing lens

#### **Design Features:**

- Digital Dual-Side Progressive Lens Design
- ▶ 6 Corridor Lengths: 10-15mm
- Uniform addition on the front surface, counterbalanced on the back to achieve the total addition power
- ▶ Clear, natural vision in all directions and at all distances
- ▶ Dramatically reduces swimming sensations

# Frezz The Freeform Personalization



MONOCULAR PUPILLARY DISTANCE



**BACK VERTEX DISTANCE** 



WRAP ANGLE FRAME CURVATURE



**PUPILAR HEIGHT** 




**PANTOSCOPIC TILT** 




**PUPILAR HEIGHT** 

### What are the patient benefits of personalization?

- Personalized lens for every wearer
- Optimization based on the prescription for each position of wear
- Clearer, wider, more comfortable near vision
- Better visual performance: better contrast, wider fields of vision, easier vision



Without Personalization

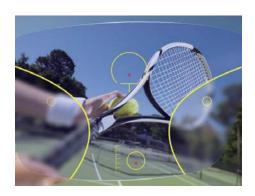

With Personalization

# FREEFORM SINGLE VISION & BIFOCAL

### My SV

The aberrations and distortion are reduced to a greater degree on My SV lens

- Maximum optical quality for any prescription
- Thinner and lighter lenses
- High precision and high personalization
- Clear vision in every gaze direction
- Oblique astigmatism reduced

Point-by-point optimization is applied over the entire lens, leading to fewer power errors in the lens periphery and allows precise optical images.

### **Anti-Fatigue SV**

Anti-fatique SV is designed primarily for 18-45 year old myopes experiencing symptoms of tired eyes because of their jobs or hobbies

- A slight addition power in the lower portion of the lens to reduce eyestrain during close up activities.
- Greater comfort than standard vision correction lenses because the wearers' natural accommodation pattern is retained.


### **EzDrive SV**

- Improving comfort of night driving by Incorporating a night vision zone in the upper part of the lens.
- Optimized vision for a better view of the dashboard, internal, and external mirrors.

### **Bifocal Meta**

The near vision segment is expanded up to the entire half area, offering a noticeably larger near viewing area while maintaining panoramic distance vision.





Aspheric/Atoric lenses use multiple curvatures to reduce peripheral defocus and aberration





### **Bifocal Freeround**

The near vision segment is very similar to a conventional round top bifocal. This solution is perfect for those who already wear bifocal lenses and want better aesthetics.







MOOFX IS AN INNOVATIVE SPECTACLE LENS WE MUST START A MYOPIA MANAGEMENT RIGHT NOW








Easy to adapt with myopia control area

Acta Ophthalmologica, DOI: 10.1111/aos.15649

## MYOPIA SOLUTION

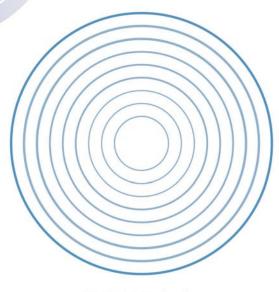


F.I.M.C.A.Technology Fluctuation Induced by Micro-Cylindrical Annular

### MOOFX

#### **MYOPIA MANAGEMENT LENS**

A cylindrical focal plan in front of the retina to induce dynamic defocus signal for myopia control

C. C. C. C. C. C. C.






#### THEORY - PRACTICE - PATENT

By performing corneal topographies of the eye after wearing orthokeratology lenses, they realized that corneal astigmatism was distributed in concentric circles.

# **Engraving of Gino Progressive lenses**

#### Freeform Progressive

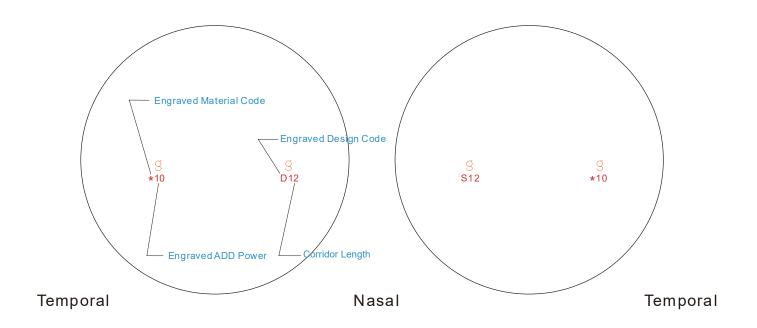

Lens Material	Material Code
1.50	С
1.56	M
1.59	Р
1.60	Н
1.67	S
1.74	X


Lens Design	Design Code
Frezz Standard	Р
Frezz EasiFit	E
Frezz Dynamic	D
Frezz Compo	С
Frezz Nature	NX
Frezz MiniFit	M
Frezz Reader	R
Frezz EzDrive	V
Frezz OptiMaxerDS	OMD

Conventional Progressive	Axial	Nasal Side	Temporal Side	Material Material	Index
Conventional Progressive	Layout	Design Code/Corridor	Addition/Index Key	Material	Hucx
Vega HD Classic 1.5	0 0	A1	175	Organic	1.5
Vega HD Short 1.5	0 0	AS	175	Organic	1.5
Vega HD Classic 1.6	0 0	A1	175	Organic	1.6

### **TREATMENTS**

#### BlueFreeK+

		MultiK+	Blue Light Protection
		Back side UV protection	Back side UV protection
	BlueFree	Easy cleaning Superhydrophobic	Easy cleaning Superhydrophobic
Multi	Blue Light Protection	Antistatic	Antistatic
AR layers	AR layers	AR layers	AR layers
Scratch resistant	Scratch resistant	Scratch resistant	Scratch resistant

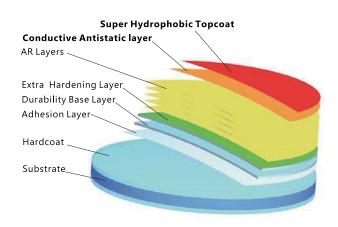



- Outstanding abrasion resistance.
- Super Hydrophobic layer increase the contact angle, that helps repel oil, water and smudge.
- Antistatic layer makes the lens free of dust.











SuperCleanCoat


**Dust-Free** 

Optimum transparency Scratch Resistant



#### Blue Cut for Digital Protection

As the widespread use of smart phones & tablets increases, people are exposed to more blue light today than ever before. Our digital devices emit strong blue light which scatters easily, reducing contrast and adding to eye fatigue.



BlueFreeK+ is designed to block harmful blue-violet light whose wavelength ranges between 380 to 455 nm, keeping the eyes in better condition.



### Solid solar tints

Wearing sunglasses is the guarantee of benefiting from tints that combine sun protection, comfort and aesthetics.




#### Solid shades on organic lenses

A complete range of solid shades on organic lenses up to 1.67.

### **Gradient tints on organic lenses**

We offer a wide choice of tints and gradient intensities on organic lenses up to 1.67. You can choose a gradient that is purely aesthetic (25/0%) or highly protective (90/40%). Wearing gradient shades is the guarantee of wearing glasses that follow fashion and protect you from the sun.

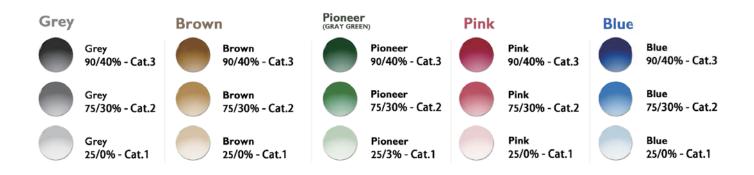

### NUPOLAR polarized lenses

## More Color Options



GRAY-3

Excellent for bright sun conditions while color integrity is maintained. Colors become richer and deeper and maximum blinding glare protection is provided.



**BROWN** 

A true, deep, rich brown that provides for a wearing experience in which the lens enhances colors and especially highlights greens.



**GREEN** 

Perfect for those who enjoy a traditional green color. It is preferred for the enhancement of colors.



Without Nupolar



With Nupolar



NUPOLAR GRADIENTS: GRAY/GRAY, BROWN/GRAY







The PhotoX Lens uses revolutionary technology to reconstruct photochromic moleculars. It breaks the molecular structure differently and when exposed in ultraviolet light, molecules of PhotoX Lens start to change structure simultaneously, which greatly improve the responding speed. As a result, lens 'color changes become faster and darker.



ATTRIBUTE	PHOTOX VS traditional photochromic lens	
CHANGING SPEED	18.5% FASTER	
DARKNESS	29.80% DARKER	
FADING SPEED	26% FASTER	

#### MORE COLORS ARE AVAILABLE TO FIT YOUR STYLE

**BROWN GREY GREEN** STANDARD COLORS **SAPPHIRE AMETHYST** STYLE COLORS







Dark enough when outdoor



Fast Reaction Fast colour changing between indoor & outdoor



**UV Protection** 100% protection against UVB & UVA




**Blue Light Block** Block blue light indoor & outdoor





### What is HEV light?

HEV light is high-frequency, high-energy light in the violet/blue band from 400 to 500 nm in the visible spectrum.

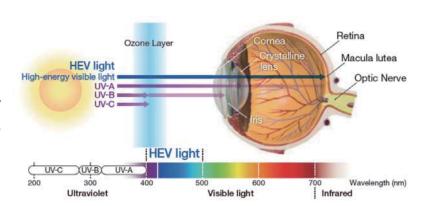

### Why do we need HEV blocking


Short-wavelength light in the 400-420 nm spectrum has high energy. So it is more likely to pass through the cornea and lens and induce harmful reaction. Younger individuals (up to 20 years old) are at particular risk, because their eye lenses are especially transparent and they tend to participate in more outdoor activities.

### What is UVNeo lens?

- Block harmful light in the 400-420 nm part of the spectrum in addtion to UV
- Colors look natural even when 400-420 nm light is blocked

#### 1.5 Stock SV

⊕Refractive Index	1.499
⊕ Abbe Value	58
⊕ Specific Gravity (gr/cm3 )	1.32
⊕ Coating	HC/Multi/Multi K+
⊕ Tints	Grey/Brown/G15
⊕ Spheric design organic	




#### 1.56 Stock SV

⊕ Refractive Index	1.56
⊕ Abbe Value	38
⊕ Specific Gravity (gr/cm3 )	1.28
⊕ Coating	HC/Multi K+
⊕ Tints	Grey/Brown/G15
⊕ Spheric design organic	



1.59 Polycarbonate Stock SV

1.33 Folycarbonate Stock SV	
⊕ Refractive Index	1.59
⊕ Abbe Value	38
⊕ Specific Gravity (gr/cm3 )	1.28
⊕ Coating	Multi
⊕ Tints	Grey/Brown
⊕ Spheric design polycarbonate	



#### 1.67 Stock SV

⊕ Refractive Index	1.67
⊕ Abbe Value	32
⊕ Specific Gravity (gr/cm3)	1.35
⊕ Coating	Multi
⊕ Tints	Grey/Brown/G15
⊕ Aspheric design organic	



#### 1.50 Polar Plano SV

⊕ Refractive Index	1.499
⊕ Abbe Value	58
⊕ Specific Gravity (gr/cm3 )	1.32
⊕ Coating	HC
⊕ Tints	
⊕ Spheric design polar	Grey/Brown




#### 1.56 Photochromic Stock SV

⊕ Refractive Index	1.56
⊕ Abbe Value	38
⊕ Specific Gravity (gr/cm3)	1.28
⊕ Coating	Multi K+
⊕ Tints	
Spheric design photochromic	Grev/Brown




#### 1.6 MR-8 Stock SV

⊕Refractive Index	1.6
⊕ Abbe Value	42
⊕ Specific Gravity (gr/cm3)	1.30
⊕ Coating	Multi/Multi K+
⊕ Tints	Grey/Brown/G15
Spheric design organic	



#### 1.74 Stock SV

⊕ Refractive Index	1.67
⊕ Abbe Value	32
⊕ Specific Gravity (gr/cm3 )	1.35
⊕ Coating	Multi
⊕ Tints	Grey/Brown/G15
Aspheric design organic	




#### 1.5 SV RX

1.0 0 0 1 1/1	
⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
+10	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

#### 1.5 PhotoX SV RX

Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown




#### 1.5 UVNeo SV RX

⊕ Refractive Index	1.5
⊕ Abbe Value	58
$\oplus$ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
+10 0 -4 +8 +6 0 0 55/60/65/70 -2 -2 -4	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
Φρος,	
-8	
-10	


#### 1.56 Photochromic SV RX

⊕ Refractive Index	1.6
⊕ Abbe Value	38
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grev/Brown




#### 1.5 Nupolar SV RX

⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15




#### 1.5 Transitions SV RX

⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown




#### 1.56 SV RX

⊕ Refractive Index	1.56
⊕ Abbe Value	38
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15



#### 1.56 UVNeo SV RX

1.00 0 11100 0 1 101	
⊕ Refractive Index	1.56
⊕ Abbe Value	38
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
+8 0 -4	




### 1.59 Polycarbonate SV RX

⊕ Re	efractive Index	1.59
⊕ Al	bbe Value	31
⊕ Co	oating	HC/Multi/Multi K+/BlueFree
⊕ Ti	nts	
+8		
-6 -8 -10		

#### 1.59 Poly Nupolar SV RX

⊕ Refractive	Index	1.59
⊕ Abbe Valu	ie	31
⊕ Coating		HC/Multi/Multi K+/BlueFree
⊕ Polarized	Color	Grey/Brown/G15
+6 0 -4 Ø55/60/65/70/75 Ø55/60/65/70		



#### 1.6 Nupolar SV RX

⊕ Refractive Index	1.61
⊕ Abbe Value	42
$\oplus$ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
+10 +8 +6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

#### 1.6 Transitions SV RX

1.0 1141131110113 3 1 1 1 1 1 1	
⊕ Refractive Index	1.61
⊕ Abbe Value	42
$\oplus$ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
+10 +8 +6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

### 1.59 Poly PhotoX SV RX

⊕ Refractive Index	1.59
⊕ Abbe Value	31
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
+6 0 -4 Ø55/60/65/70/75 Ø55/60/65/70 0 Ø56/60/65/70	
0 Ø55160165	

1.6 MR-8 SV RX


1.0 MK-0 20 KX	
⊕ Refractive Index	1.6
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
+10 +8 +6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65


1.6 PhotoX SV RX


1.0 P11010A 3V RA	
⊕ Refractive Index	1.61
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
+10 +8 +6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-8 -10	


1.6 UVNeo SV RX


	efractive Index	1.61
$\oplus$ A	bbe Value	42
$\oplus$ C	oating	HC/Multi/Multi K+/BlueFree
⊕ <b>T</b> i	ints	
+10 +8 +6 0	0 -4	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

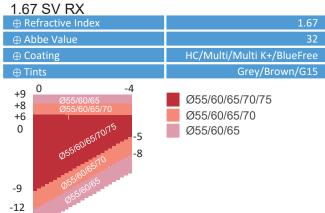


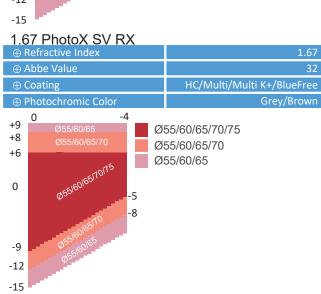


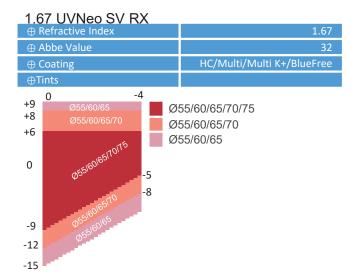

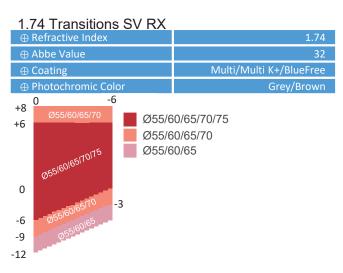

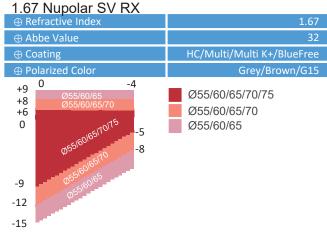

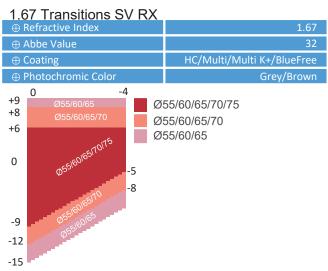

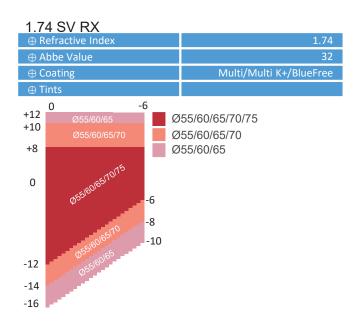


### MY SV - Anti Fatigue SV - EzDrive SV

#### 

My SV 1.5 PhotoX

-10

⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown




#### My SV 1.5 UVNeo

⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
+10 0 -4 +8 Ø55/60/65 +6 0 Ø55/60/65/70 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6 055160165	
-10 -	




IVI O V 1.00 I HOLOUTHO	11110
⊕ Refractive Index	1.6
⊕ Abbe Value	38
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown




#### My SV 1.5 Nupolar

⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
<sub>+6</sub> 0 -4	




#### My SV 1.5 Transitions

⊕ Refractive Index	1.5
⊕ Abbe Value	58
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown




#### My SV 1.56

⊕ Refractive Index	1.56
⊕ Abbe Value	38
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15



#### My SV 1.56 UVNeo

⊕ Refractive Index	1.56
⊕ Abbe Value	38
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	



### MY SV - Anti Fatigue SV - EzDrive SV

#### Mv SV 1.59 Polycarbonate

Wy 3 v 1.59 Folycarbonate		
⊕ Refractive Index	1.59	
⊕ Abbe Value	31	
⊕ Coating	HC/Multi/Multi K+/BlueFree	
⊕ Tints		
+8 +6 +6 #6 #6 #6 #6 #6 #6 #6 #6 #6 #6 #6 #6 #6		
-6 - \( \sigma_{\overline{5}} \overline{10} \) \( \sigma_{\overline{5}} \overline{10} \) \( \sigma_{\overline{5}} \overline{5} \) \( \sigma_{\overline{5}} \overline{5}		

### My SV 1.59 Poly PhotoX

⊕ Refractive Index	1.59
⊕ Abbe Value	31
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
	50/65/70/75 50/65/70
-8	
· ·	

#### My SV 1.59 Poly Nupolar

⊕ Refractive Index	1.59
⊕ Abbe Value	31
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
	60/65/70/75 60/65/70
-8	

My SV 1.6 MR-8

⊕ Refractive Index	1.6
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
+10 +8 +6 0 Ø55/60/65/70 Ø55/60/65/70  -2 Ø55/60/65/70  -4	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-0 (Displication)	
-8	
-10	

My SV 1.6 Nupolar

⊕ Refractive Index	1.61
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
+10 0 -4 +8 +6 0 055/60/65/70 -2 -4 055/60/65/70 -2 -4 -4 -6 -8 -10	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

My SV 1.6 PhotoX


⊕ Refractive Index	1.61
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
+10	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6 055160165 055160165	
-8	
-10	


My SV 1.6 Transitions	
⊕ Refractive Index	1.61
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
+10 +8 +6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
Φροί-	
-8	
-10	


#### My SV 1.6 UVNeo

⊕ Refractive Index	1.61
⊕ Abbe Value	42
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
+10	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

### MY SV - Anti Fatigue SV - EzDrive SV

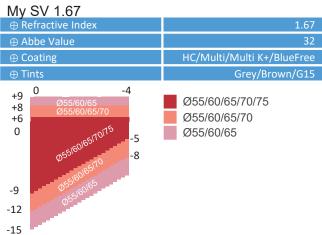


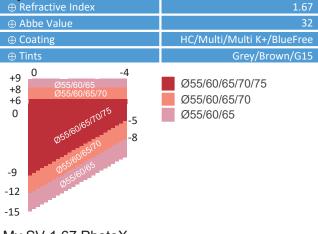


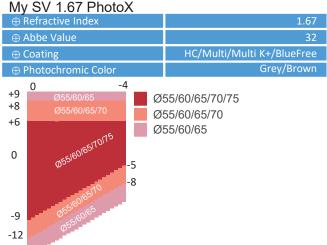



-15

Му	SV 1.67 UVNeo	)	
⊕ F	Refractive Index		1.67
$\oplus$ A	Abbe Value		32
$\oplus$ (	Coating		HC/Multi/Multi K+/BlueFree
⊕ 7	lints		
. 0	0 -4		
+9 +8	Ø55/60/65	Ø	55/60/65/70/75
	Ø55/60/65/70	Ø	55/60/65/70
+6	<sub>Ø55/60/65/70</sub> /75	Ø	55/60/65
0	Φ <sub>55</sub>  60 65,	5	
		8	
-9	Φ <sub>23</sub> , Θ <sub>1</sub> Θ <sub>2</sub>		
-12	Φ3		
-15			

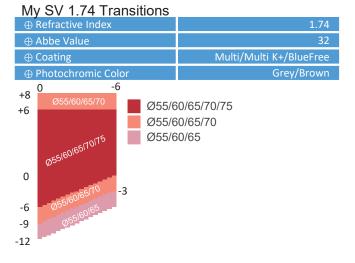

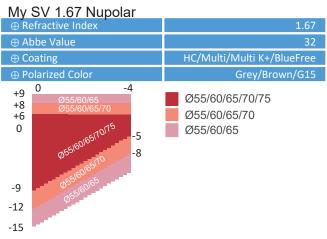

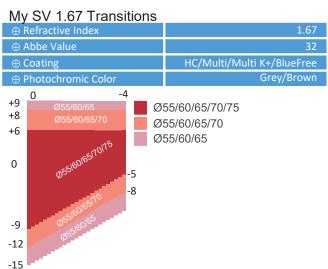


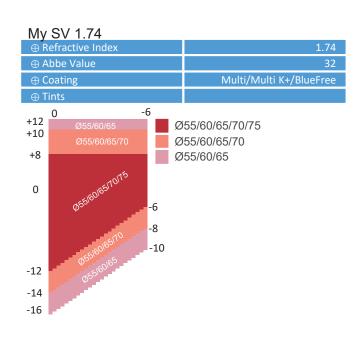

### FREZZ MOOFX

### Frezz MOOFX 1.59 Polycarbonate


⊕ Refractive Index	1.59
⊕ Abbe Value	31
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	



### FREZZ Standard - EasyFit - Dynamic - MiniFit - Compo - Reader - EzDrive


#### Frezz Standard 1.5

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20 18 and 16mm




#### Frezz Standard 1.5 PhotoX

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.5 UVNeo

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.56 Photochromic

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.5 Nupolar

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.5 Transitions

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.56

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm



#### Frezz Standard 1.56 UVNeo

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.59 Polycarbonate

11022 Glaridara 1100 F Glybar Bornato		
⊕ Coating		HC/Multi/Multi K+/BlueFree
⊕ Tints		
⊕ Additio	ns:	0.50 to 4.00
⊕ Corrido	rs length:	16,14 and 12mm
⊕ Min red	commended FT:	20,18 and 16mm
+6	Ø	55/60/65/70/75 55/60/65/70 55/60/65
	55 60 00 2 4 4 	
-6	55510	
-8	Ø551	

#### Frezz Standard 1.59 Poly Nupolar

	J
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




Frezz Standard 1.6 Nupolar	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6	
-10	

#### Frezz Standard 1.6 Transitions

TICZZ Clandard 1.0 Tran	31110113
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm
+8 Ø55/60/65/70 +6 Ø55/60/65/70  Ø55/60/65/70  -2 -4  -6 Ø55/60/65	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6 Ø55/60/65 -8 Ø55/60/65	
-8 Ø <sup>5510°</sup>	
-10	

#### Frezz Standard 1.59 Poly PhotoX

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm



#### Frezz Standard 1.6

TIEZZ Glandaru T.O	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6	
-8 Ø55100	
-10	

#### Frezz Standard 1 6 PhotoX


FIEZZ Standard 1.0 FIIOt	07
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Gery/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm
+8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

Frezz Standard 1.6 UVNeo	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm
+8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6	

### FREZZ Standard - EasyFit - Dynamic - MiniFit - Compo - Reader - EzDrive


#### Frezz Standard 1.67

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.67 PhotoX

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.67 UVNeo

⊕ Coating	Multi/Multi K+/BlueFree
<b>⊕Tints</b>	
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.74 Transitions

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.67 Nupolar

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.67 Transitions

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Standard 1.74

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Tints	
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,14 and 12mm
⊕ Min recommended FT:	20,18 and 16mm




#### Frezz Nature 1.5

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
Min recommended ET:	20 10 18 17 16 15 1/




#### Frezz Nature 1.5 PhotoX

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.5 UVNeo

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.56 Photochromic

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



#### Frezz Nature 1.5 Nupolar

$\oplus$ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.5 Transitions

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.56

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.56 UVNeo

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



#### Frezz Nature 1.59 Polycarbonate

$\oplus$ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20.19.18.17.16.15.14



#### Frezz Nature 1.59 Poly Nupolar

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



#### Frezz Nature 1.6 Nupolar


· · · - — · · · · · · · · · · · · · · ·	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
+8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

#### Frezz Nature 1.6 Transitions

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
+8 0 -4  #6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6 Ø55 60 65 -8 Ø55 60 65	
-8 Ø <sup>5510</sup>	
-10	

#### Frezz Nature 1.59 Poly PhotoX

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



#### Frezz Nature 1.6

1 1022 1144410 1.0	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6 Ø55160165 -8 Ø55160165	
-10	

#### Frezz Nature 1.6 PhotoX


	-
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Gery/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
+8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

Frezz Nature 1.6 UVNec	)
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
+8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6 -8 -765   60   65   65   65   65   65   65	

### **FREZZ Nature**


#### Frezz Nature 1.67

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.67 PhotoX

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



#### Frezz Nature 1.67 UVNeo

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.74 Transitions

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.67 Nupolar

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Polarized Color	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz Nature 1.67 Transitions

$\oplus$ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



#### Frezz Nature 1.74

TICEE Nature 1.7 T	
$\oplus$ Coating	Multi/Multi K+/BlueFree
⊕ Tints	
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



### FREZZ OptiMaxerDS

#### Frezz OptiMaxerDS 1.5

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20 19 18 17 16 15 14




#### Frezz OptiMaxerDS 1.6

Frezz OptiMaxerDS 1.6	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
+8 +6 0  055/60/65/70 -4 -6 -6 -6 -6 -6 -6 -6 -6 -6 -6 -6 -6 -6	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-6	

#### Frezz OptiMaxerDS 1.67

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
Min recommended ET:	20 10 18 17 16 15 14




#### Frezz OptiMaxerDS 1.74

-12 -14 -16

⊕ Coa	iting		Multi/Multi K+/BlueFree
⊕ Tin	ts		
⊕ Ado	ditions:		0.50 to 4.00
⊕ Cor	ridors length:		16,15,14,13,12,11,10
⊕ Mir	n recommended FT:		20,19,18,17,16,15,14
+12 +10 +8 0	Ø55/60/65 Ø55/60/65/70	-6 -8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

#### Frezz OptiMaxerDS 1.5 PhotoX

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14




#### Frezz OptiMaxerDS 1.6 PhotoX

1 1022 Optimaxcibo 1.0 i	HOTOX
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Gery/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-8 Ø <sup>65</sup>	

#### Frezz OptiMaxerDS 1.67 PhotoX


⊕ Coating	Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	16,15,14,13,12,11,10
⊕ Min recommended FT:	20,19,18,17,16,15,14



### FREZZ Bifocal Meta - Bifocal Freeround

#### Frezz Bifocal Meta 1.5

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	
Min recommended ET:	




#### Frezz Rifocal Meta 1.6

Frezz Bitocal Meta 1.6	
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	
⊕ Min recommended FT:	
+8 +6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65

#### Frezz Bifocal Meta 1.67

⊕ Coating	Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	
⊕ Min recommended FT:	




#### Frezz Bifocal Meta 1.74

⊕ Tint	S	
⊕ Add	litions:	0.50 to 4.00
⊕ Cori	ridors length:	
⊕ Min	recommended FT:	
+12 +10 +8 0	0 -6 Ø55/60/65 Ø55/60/65/70 -6 Ø56/60/65/70 -8	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-12	Φ55 <sup>160</sup>	
-14		
-16	_	

Multi/Multi K+/BlueFree

#### Frezz Bifocal Meta 1.5 PhotoX

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Grey/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	
⊕ Min recommended FT:	




#### Frezz Bifocal Meta 1.6 PhotoX

1 1022 Bilocal Mota 1.01	1101071
⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Photochromic Color	Gery/Brown
⊕ Additions:	0.50 to 4.00
⊕ Corridors length:	
⊕ Min recommended FT:	
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Ø55/60/65/70/75 Ø55/60/65/70 Ø55/60/65
-10	

#### Frezz Rifocal Meta 1 67 PhotoX


Frezz	z Bitocai ivieta	1.67	PhotoX	
⊕ Coa	ting		Multi/Multi	K+/BlueFree
⊕ Pho	tochromic Color			Grey/Brown
⊕ Add	itions:			0.50 to 4.00
⊕ Cor	ridors length:			
⊕ Min	recommended FT	:		
_	0	-6		
+9 +8	Ø55/60/65		Ø55/60/65/70/75	
+8			Ø55/60/65/70	



### **VEGAHD**


#### VEGAHD Class 1.5

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown/G15
⊕ Additions:	1.00 to 3.50
⊕ Corridors length:	15mm
⊕ Min recommended FT·	19mm




#### VEGAHD Evolution 1.6 MR-8

⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Additions:	1.00 to 3.50
⊕ Corridors length:	15mm
⊕ Min recommended FT:	19mm



#### VEGAHD Short 1.5


⊕ Coating	HC/Multi/Multi K+/BlueFree
⊕ Tints	Grey/Brown
⊕ Additions:	1.00 to 3.50
⊕ Corridors length:	12mm
⊕ Min recommended FT:	15mm



### **BIFOCAL**

#### Bifocal FT RX 1.5

⊕ Coating	HC/Multi/Multi K+
⊕ Additions:	1.00 to 3.00
⊕ Min recommended FT:	14mm




#### Bifocal FT RX 1.56 Photochromic

⊕ Coa	nting			HC/Multi/Multi ł	(+
⊕ Add	ditions:			1.00 to 3.0	
	n recommended I	FT:		14m	m
+8 +6	0 -4 Ø55/60/65		/60/65/70 /60/65		
0	<sub>Ø551601651</sub> 70	4			
-8 -10	Ø55/60/65				


#### Bifocal FT RX 1.56


⊕ Coating	HC/Multi/Multi K+
⊕ Additions:	1.00 to 3.00
⊕ Min recommended FT:	14mm





#### Bifocal FT RX 1.59 Polycarbonate

⊕ Coating	HC/Multi/Multi K+
⊕ Additions:	1.00 to 3.00
⊕ Min recommended FT:	14mm



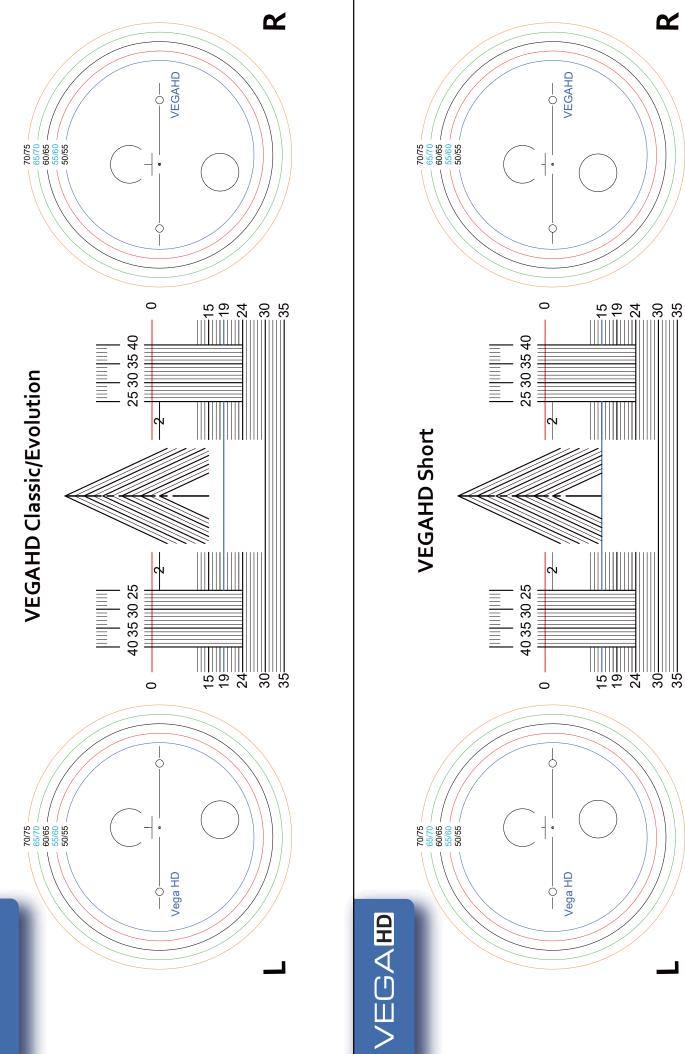

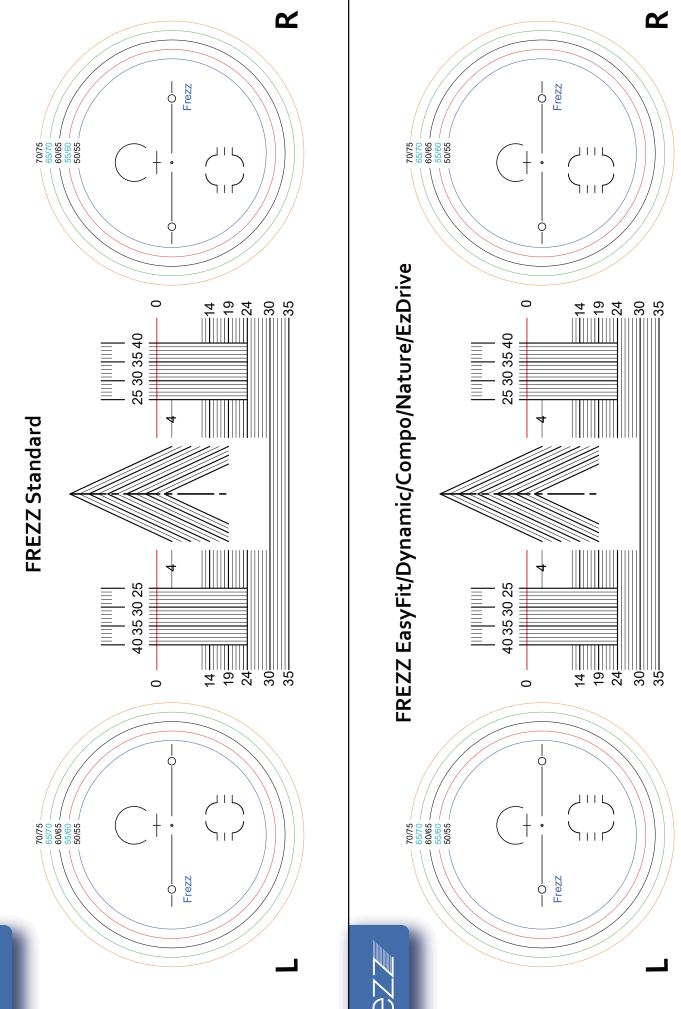

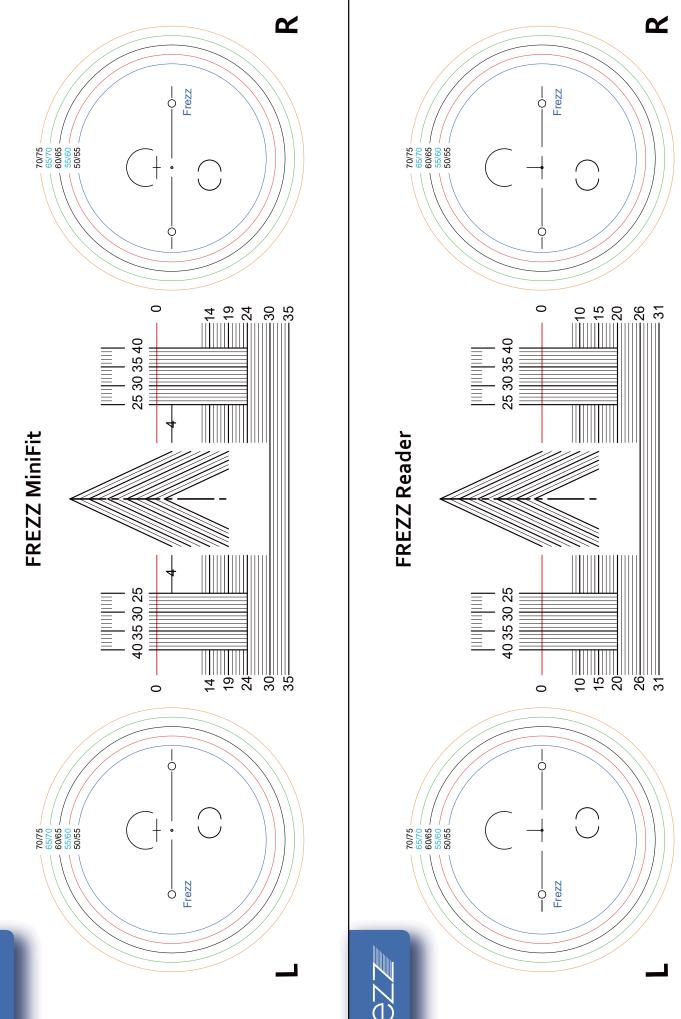



## PRODUCTION LOCATIONS

GINO OPTICAL PUDONG, SHANGHAI, CHINA GINO OPTICAL LAT KRABANG, BANGKOK, THAILAND VERBALTREMBLAY-EN-FRANCE, FRANCE

### **CONTACT INFO**

NO. 800, QINGDAI ROAD, PUDONG SHANGHAI, CHINA Email: info@ginoptic.com

www.ginoptic.com